

Manufacturing :



Mfg by :
NANOVISION

No.4/35, Sakthi Nagar Main Road, Sri Sakthi Nagar,
Arumbakkam, Chennai,- 600106. Tamilnadu, India.
Ph: 044 - 48655800, Mob : +91 94443 53342 / +91 97911 61666
email : info@nanovision.in / web : www.nanovision.in

NANO VISION
We Create Vision
INTRAOCULAR LENS

NANO CLARO

Hydrophobic Acrylic 360° Square Edge Aspheric Intraocular Lenses
Lentille Intraoculaire Acrylique Hydrophobe à Bord Carré sur 360° Asphérique
Lente Intraocular 360° Borde Cuadrado Asférico Acrílico Hidrofóbico

SEMILOADED HYDROPHOBIC LENS




Model	NHPC 600	NHPC 600SQ
Optic diameter	6.00 mm	6.00 mm
Overall length	12.50 mm	12.50 mm
Optics Design	Aspheric Equiconvex	Aspheric Equiconvex
Diopter Range	5.0 D - 30.0 D (In 0.5 Diopters Increments)	5.0 D - 30.0 D (In 0.5 Diopters Increments)
Refractive Index @ 25°C	1.4933	1.4933
Lens Material	Hydrophobic Acrylic	Hydrophobic Acrylic
A constant	118.0	118.0
Delivery System	Disposable Injector Cartridge - 2.6mm incision	Disposable Injector Cartridge - 2.6mm incision

NANO CLARO PLUS

Hydrophobic Acrylic 360° Square Edge Aspheric Intraocular Lenses with Preloaded Injector
Lentille Intraoculaire Acrylique Hydrophobe à Bord Carré sur 360° Asphérique Préchargé
Lente Intraocular 360° Borde Cuadrado Asférico Acrílico Hidrofóbico Precargado

PRELOADED HYDROPHOBIC LENS

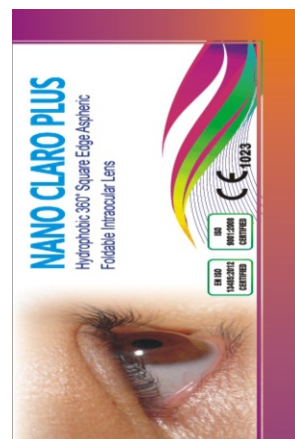

Model	NHPC 600P	NHPC 600PSQ
Optic diameter	6.00 mm	6.00 mm
Overall length	12.50 mm	12.50 mm
Optics Design	Aspheric Equiconvex	Aspheric Equiconvex
Diopter Range	5.0 D - 30.0 D (In 0.5 Diopters Increments)	5.0 D - 30.0 D (In 0.5 Diopters Increments)
Refractive Index @ 25°C	1.4933	1.4933
Lens Material	Hydrophobic Acrylic	Hydrophobic Acrylic
A constant	118.0	118.0
Delivery System	Preloaded - 2.4mm incision	Preloaded - 2.4mm incision

NANO DRAPES

Eye Drapes
Eye pad
Eye Sheild

Patient Cap & Mask
Surgeon Gown
Show Cover



Eye Drapes

Model NED: 1012
Size 100cm x 120cm



Eye Drapes

Model NED: 1010
Size 100cm x 100cm



Eye Drapes

Model NED: 1070
Size 100cm x 70cm



Eye Drapes

Model NED: 8080
Size 80cm x 80cm



Eye Drapes

Model NED: 6060
Size 60cm x 60cm



Surgeon Gown
Size : XL,XXL,XXXL



Eye pad



Eye Sheild

PHARMA PRODUCTS



Fluorescein Injection
IP 20% Injection
Sterile 10 x 3 ml

Fluorescein Injection USP & IP 20% w/v
Inyección de fluoresceína USP & IP 20% p/v
Inyección fluoresceína USP Y IP 20% w/v

- Sterile Fluorescein sodium 20% aqueous solution packed in 3ml Ampoules.
- The solution is pyrogen free and preservative free.
- Used to detect the defects in corneal epithelium, Contact lens fitting, Tear flow assessment, ophthalmic angiography.



Ophthalmic Visco surgical Device
Hydroxypropyl Methylcellulose Ophthalmic Solution USP 2% w/v

Hydroxy propyl Methyl cellulose Ophthalmic Solution USP 2% w/v
Hydroxy propyl méthyl cellulose solution ophtalmique USP 2% p/v
Hidroxi propil metil celulosa USP Solución oftálmica 2% w/v

- HPMC visc is 2% aqueous solution of Hydroxy propyl methyl cellulose packed in 2ml sterile vial and Pre fill syringe.
- This solution is Premium grade Viscoelastic Solution with the viscosity of 4000cPs
- The product is Clear, Sterile, isotonic and Non-pyrogenic.
- It Protects and remains adjacent to corneal endothelium during cataract surgery. Selectively moves and isolates tissues in anterior chamber.



Nano Visco
Ophthalmic Visco Surgical Device
Hydroxypropyl Methylcellulose Ophthalmic Solution USP 2% w/v

Hydroxy propyl Methyl cellulose Ophthalmic Solution USP 2% w/v
Hydroxy propyl méthyl cellulose solution ophtalmique USP 2% p/v
Hidroxi propil metil celulosa USP Solución oftálmica 2% w/v

- 2% aqueous solution of Hydroxy propyl methyl cellulose packed in 5ml sterile vial and Pre fill syringe.
- This solution is Premium grade Viscoelastic Solution with the viscosity of 4000cPs
- The product is Clear, Sterile, isotonic and Non-pyrogenic.
- It Protects and remains adjacent to corneal endothelium during cataract surgery. Selectively moves and isolates tissues in anterior chamber.

NANOGRAND

Yellow Hydrophobic Acrylic 360° Square Edge Aspheric Intraocular Lenses
Jaune Lentille Intraoculaire Acrylique Hydrophobe à Bord Carré sur 360° Asphérique
Amarillo Lente Intraocular 360° Borde Cuadrado Asférico Acrílico Hidrofóbico

SEMILOADED HYDROPHOBIC LENS




Model	NHPC 600Y	NHPC 600QY
Optic diameter	6.00 mm	6.00 mm
Overall length	12.50 mm	12.50 mm
Optics Design	Aspheric Equiconvex	Aspheric Equiconvex
Diopter Range	5.0 D - 30.0 D (In 0.5 Diopters Increments)	5.0 D - 30.0 D (In 0.5 Diopters Increments)
Refractive Index @ 25°C	1.4933	1.4933
Lens Material	Hydrophobic Acrylic	Hydrophobic Acrylic
A constant	118.0	118.0
Delivery System	Disposable Injector Cartridge - 2.6mm incision	Disposable Injector Cartridge - 2.6mm incision

NANOGRAND PLUS

Yellow Hydrophobic Acrylic 360° Square Edge Aspheric Intraocular Lenses with Preloaded Injector
Jaune Lentille Intraoculaire Acrylique Hydrophobe à Bord Carré sur 360° Asphérique Préchargé
Amarillo Lente Intraocular 360° Borde Cuadrado Asférico Acrílico Hidrofóbico Precargado

PRELOADED HYDROPHOBIC LENS

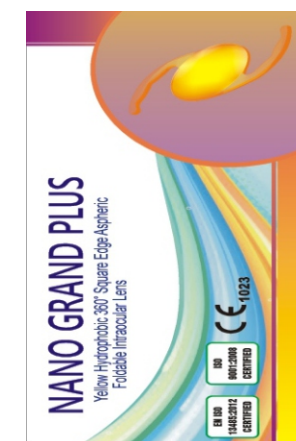

Model	NHPC 600 PY	NHPC 600PQY
Optic diameter	6.00 mm	6.00 mm
Overall length	12.50 mm	12.50 mm
Optics Design	Aspheric Equiconvex	Aspheric Equiconvex
Diopter Range	5.0 D - 30.0 D (In 0.5 Diopters Increments)	5.0 D - 30.0 D (In 0.5 Diopters Increments)
Refractive Index @ 25°C	1.4933	1.4933
Lens Material	Hydrophobic Acrylic	Hydrophobic Acrylic
A constant	118.0	118.0
Delivery System	Preloaded - 2.4mm incision	Preloaded - 2.4mm incision


MULTIFOCAL HYDROPHILIC INTRAOCULAR LENS

Nano Hi Diff

Diffraction-Refractive Multifocal Hydrophilic Intraocular Lens

Technical Specifications:


Model	NDFR 600
Optic Design	Single Piece, Diffraction-Refractive, 360° Square Edge with Aspheric Optic
Material	Hydrophilic Acrylic
Near Addition	+3.50 D
Optic Size	6.00 mm
Over All length	12.50 mm
Haptic Design	Dual Haptic
A-Constant	118.00
Refractive Index	1.4600
Delivery System	Disposable Injector & cartridge Incision size 2.20 mm to 2.60 mm
Sterilization	Steam

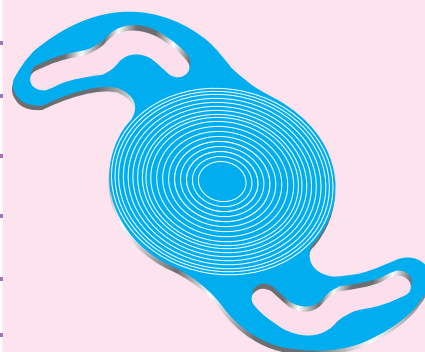

Features

- Anterior Diffraction Surface
- Posterior Aspheric Surface with 360° Square Edge
- Maximum Light Transmission - Better Visual Quality
- RNI- Energy Distribution for Far and Near focus 60/40
- Diopter Range +5.00 D to +30.00 D with 0.50 D steps

Energy Scanning

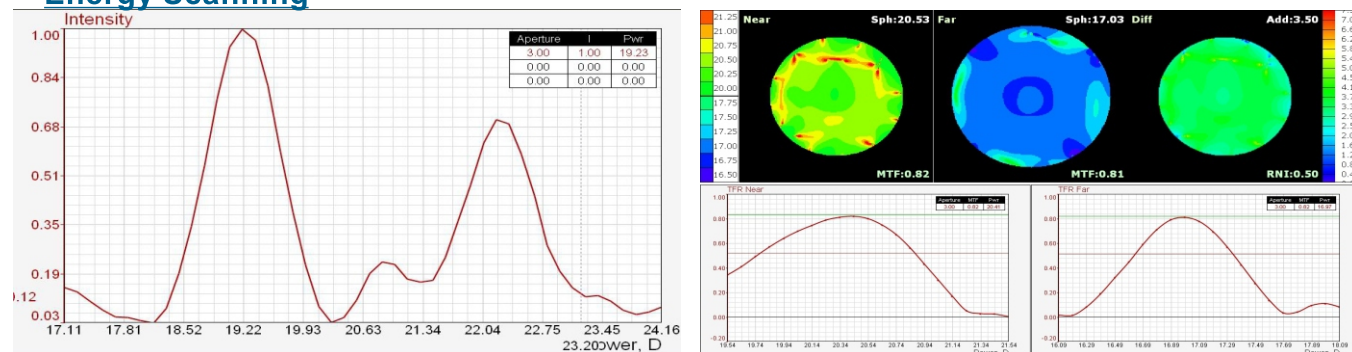

PHARMA PRODUCTS



TRYPAN BLUE
Ophthalmic
Solution
1 ml PFS

Trypan Blue Ophthalmic Solution 1ml PFS
Bleu Trypan solution ophtalmique 1 ml PFS
Azul tripan Solución Oftálmica 1 ml PFS


- Trypan Blue is sterile Trypan blue 0.6% aqueous solution. Packed in 1ml sterile vial with buffered solution.
- Used to evaluate viability of endothelial cell and Staining of acellular ILM & ERM
- Used in Cataract surgery and Chromovitrectomy surgery.



Carbachol
Intraocular
Solution USP
0.01 % w/v


Carbachol Intraocular Solution USP 0.01 % w/v
Carbachol Intraoculaire Solution USP 0,01 % p/v
Carbacol intraocular Solución USP 0.01% w/v

- Carbachol intraocular solution, U.S.P. is a sterile balanced salt solution of Carbachol USP 0.01% w/v with Sterile aqueous baseq.s in contents of 1ml vial for intraocular injection.
- They reduce the intensity of intraocular pressure elevation during the first 24 hours after a cataract surgery.
- Box of 10 X 1 ml individually packed.



Schirmer-Strips

- The diagnostic Schirmer tear test strip is currently supplied as a strip of 5 mm x 30 mm Whatman no. 41 filter paper marked with calibrated 1 mm gradations to clearly record the length of moistened area
- Used as a simple but highly diagnostic tool of routine ocular examination.
- Conveniently can be used for both left and right eyes.
- Box of 100 individually packed sterile strips.



Fluorescein Strips

- The diagnostic each strip containing lint-free paper applicators impregnated with 1.0 mg of Fluorescein Sodium
- Used to visualize defects or aberrations in the corneal epithelium, herpetic lesion or foreign body by staining the areas of cellular loss
- Used in determining the site of an intraocular injury.
- Box of 100 individually packed sterile strips.

NANOSHARP

Ophthalmic Micro Surgical Blades
Oftálmica Micro cuchillas quirúrgicas
Ophthalmique Micro lames chirurgicales

Keratome Blades (Sharp Tip) For Phaco Stab Incision Straight / Angled 45 Deg. Bevel Up/Down
Keratome Blades (Sharp Astuce)
Queratomo Cuchillas (punta aguda)



MODEL	SIZE	DESCRIPTION
NS 2620ST	2.65mm	20 Gauge
NS 2820ST	2.8mm	20 Gauge
NS 3019ST	3.0mm	19 Gauge
NS 3219ST	3.2mm	19 Gauge
NS 3519ST	3.5mm	19 Gauge

SPECIAL ORDER

MODEL	SIZE	DESCRIPTION
NS 1524ST	1.5mm	24 Gauge
NS 1820ST	1.8MM	20 Gauge
NS 2020ST	2.0mm	20 Gauge
NS 2320ST	2.3mm	20 Gauge
NS 2520ST	2.5mm	20 Gauge



Keratome Blades (Blunt Tip) For IOL Enlarging
Keratome Blades (bont Astuce)
Queratomo Cuchillas (Blunt Tip)

MODEL	SIZE	DESCRIPTION
NS 3518BT	3.5mm	18 Gauge
NS 3818BT	3.8mm	18 Gauge
NS 4018BT	4.0mm	18 Gauge

SPECIAL ORDER

MODEL	SIZE	DESCRIPTION
NS5116BT	5.1mm	16 Gauge
NS5516BT	5.5mm	16 Gauge
NS6015BT	6.0mm	15 Gauge



Crescent Blades for Tunnel Incision Straight / Angled 45 Deg. Bevel Up / Down
Croissant-Blades
Crescent Cuchillas

MODEL	SIZE	DESCRIPTION
NS 2020TI	2.0mm	20 Gauge
NS 2520TI	2.5mm	20 Gauge



Lance Tip Knives for Initial Incision Lance Tip
Lance Astuce Couteaux
Punta de lanza cuchillos
Length : 12mm / Grinding Width (Cutting) : 6.5mm, Angled 15 Deg.

MODEL	SIZE	DESCRIPTION
NS 1524LT	15 Deg	24 Gauge
NS 3024LT	30 Deg	24 Gauge
NS 4524LT	45 Deg	24 Gauge



MVR Blades for Water Tight Self Sealing Incision Straight / Angled 45 Deg. Bevel Up / Down
MVR Blades
MVR Cuchillas

MODEL	DESCRIPTION
NS 19MVR	19 Gauge
NS 20MVR	20 Gauge
NS 24MVR	24 Gauge

MULTIFOCAL HYDROPHOBIC INTRAOCULAR LENS

Nano Hi Diff +

Diffraction-Refractive Multifocal Hydrophobic Intraocular Lens^S

Technical Specifications:

Model	NHDFC 600P
Optic Design	Single Piece, Diffractive-Refractive, 360° Square Edge with Aspheric Optic
Material	Hydrophobic Acrylic
Near Addition	+3.00 D
Optic Size	6.00 mm
Over All length	13.00 mm
Haptic Design	Modified C
A-Constant	118.00
Refractive Index	1.4915
Delivery System	Preloaded System with incision size 2.60mm
Sterilization	Steam




Features

- Near Addition +3.00D
- Unfolding time less than 10sec
- Anterior Diffractive Surface
- Posterior Aspheric Surface with 360° Square Edge
- Maximum Light Transmission - Better Visual Quality
- RNI- Energy Distribution for Far and Near focus 60/40
- Diopter Range +10.00 D to +30.00 D with 0.50 D steps
- Better Image Quality with Negative Spherical aberration

NANOFOLD


Hydrophilic Acrylic Posterior Chamber Single Piece Foldable Intraocular Lens
 Implant Pliable Acrylique Hydrophile Pour Chambre Postérieure
 Lente Intraoculaire Acrílico Hidrofilico, Plegable De Una Pieza Para Cámara Posterior



Model	NFR 574	NFR 600	NFC 600	NFM 604
Optic Design	Equiconvex	Equiconvex	Equiconvex	Equiconvex
Optic Size	5.75 mm	6.00 mm	6.00 mm	6.00 mm
Over all Length	12.00 mm	12.50 mm	12.50 mm	11.00 mm
Haptic Angle	0 °	0 °	0 °	0 °
A.Constant*	118.0	118.0	118.0	118.0
AC Depth*	5.00 mm	5.00 mm	5.00 mm	5.00 mm

NANOFOLD

360°square Edge Acrylic Foldable Intraocular Lens
 Implant Pliable Acrylique Hydrophile Pour Chambre Postérieure A Bord Carre A 360°
 Lente Intraoculaire Acrílico Hidrofilico, Plegable De Una Pieza, Borde Cuadrado,
 360 Para Cámara Posterior



Model	NFR 574 SQ	NFR 600 SQ	NFC 600 SQ	NFM 604 SQ
Optic Design	Equiconvex	Equiconvex	Equiconvex	Equiconvex
Optic Size	5.75 mm	6.00 mm	6.00 mm	6.00 mm
Over all Length	12.00 mm	12.50 mm	12.50 mm	11.00 mm
Haptic Angle	0 °	0 °	0 °	0 °
A.Constant*	118.0	118.0	118.0	118.0
AC Depth*	5.00 mm	5.00 mm	5.00 mm	5.00 mm

- ◆ Smooth insertion and perfect centeration in the eye.
- ◆ Optics with 360 ° Enhanced Square Edge for low incidence of PCO.
- ◆ Aspheric Optics with aberration controlled, better visual acuity and Enhanced contrast.

NANO JET

Hydraulic Disposable Injector & Cartridge
 Hydraulique jetable injecteur et cartouche
 Hidráulico desechable inyector y cartucho



DISPOSABLE CARTRIDGE FOR FOLDABEL IOL IMPLANT


Model	Shape incision Size	Shape incision Size
NDC 300	Oval	3.00 mm
NDC 280	Oval	2.80 mm
NDC 260	Oval	2.60 mm
NDC 220	Oval	2.20 mm
NDC 160	Oval	1.60 mm

NANOHOOKS

IRIS Hooks
 IRIS Crochet
 IRIS Ganchos



Capsular Hooks
 Capsulaire Crochet
 Capsular Ganchos

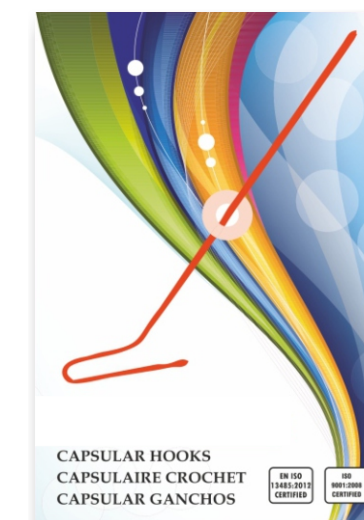

NANO IRIS

PMMA Iris Claw Intraocular Lens
PMMA Iris Claw lentille intraoculaire
PMMA Iris Claw Lente Intraocular



Model

Optic Design
Optic Size
Over all Length
Haptic Design
Dialing Holes
A.Constant*
AC Depth*



NIRS 4272H

Convex / Concave
4.20 mm
7.20 mm
Spherical
-
115
2.95



NIRS 5585H

Convex / Concave
5.50 mm
8.50 mm
Spherical
-
115
2.95

NANO RING

PMMA Capsular Tension Ring
Anneau De Tension Capsulaire En PMMA
Anillo PMMA De Tension Capsular




Model

Normal Size
Compressed Size



NCR 1109	NCR 1210
11.00 mm	12.00 mm
09.00 mm	10.00 mm



NCR 1311	NCR 1412
13.00 mm	14.00 mm
11.00 mm	12.00 mm



TYPE - 10

PMMA Capsular Segment Ring
Anneaux Pour Capsule Segment En PMMA
Segmento De Anillo PMMA De Tension Capsular

PMMA Modified Capsular Tension Ring
Anneau De Tention Capsulaire Modifié En PMMA
Anillo PMMA De Tension Capsular Modificado



Model

Normal Size
Compressed Size
Fixation Hook



NCC 1210L	NCC 1311L
12.00 mm	13.00 mm
10.00 mm	11.00 mm
Left side, step vault	




NCC 1210R	NCC 1311R
12.00 mm	13.00 mm
10.00 mm	11.00 mm
Right side, step vault	



NCC 1210LR	NCC 1311LR
12.00 mm	13.00 mm
10.00 mm	11.00 mm
Both side, step vault	

NANO FLEX

Hydrophilic Acrylic 360° Square Edge Aspheric Foldable Intraocular Lens
Implant Pliable Acrylique Hydrophile Aspherique Pour Chambre Postérieure A Bord Carre A 360°
Lente Intraocular Acrilico Hidrofilico, Asferico, Plegable De Una Pieza, Borde Cuadrado, 360° Para Cámara Posterior



Model

Optic Design
Optic Size
Over all Length
Haptic Angle
A.Constant*
AC Depth*



NFR 574 AS

Equiconvex
5.75 mm
12.00 mm
0 °
118.0
5.00 mm



NFR 600 AS

Equiconvex
6.00 mm
12.50 mm
0 °
118.0
5.00 mm



NFC 600 AS

Equiconvex
6.00 mm
12.50 mm
0 °
118.0
5.00 mm




NFM 604 AS

Equiconvex
6.00 mm
11.00 mm
0 °
118.0
5.00 mm


NANO FLEX

Yellow Hydrophilic Acrylic 360° Square Edge Aspheric Foldable Intraocular Lens
Implant Pliable Jaune Acrylique Hydrophile Aspherique Pour Chambre Postérieure A Bord Carre A 360°
Lente Intraocular Acrilico Hidrofilico, Asferico, Plegable De Una Pieza, Amarillo, Borde Cuadrado, 360° Para Cámara Posterior




Model

Optic Design
Optic Size
Over all Length
Haptic Angle
A.Constant*
AC Depth*




NFR 574 ASY

Equiconvex
5.75 mm
12.00 mm
0 °
118.0
5.00 mm




NFR 600 ASY

Equiconvex
6.00 mm
12.50 mm
0 °
118.0
5.00 mm



NFC 600 ASY

Equiconvex
6.00 mm
12.50 mm
0 °
118.0
5.00 mm




NFM 604 ASY

Equiconvex
6.00 mm
11.00 mm
0 °
118.0
5.00 mm

- ◆ CE, EN ISO 13485:2016 & ISO 9001:2015 Certified
- ◆ Complies to essential requirements of Directive MDD 93 / 42 / EEC
- ◆ Complies to International Standard ISO 11979-1 to 10, Ophthalmic Implants - Intraocular lenses

NANO IOL

PMMA Posterior / Anterior Chamber Single Piece Intraocular Lens
 Implant En PMMA Pour Chambre Postérieure / Antérieure Une Seule Pièce
 Lente Intraoculaire PMMA De Une Pièce Para Camara Posterior / Anterior



Model

Optic Design
 Optic Size
 Over all Length
 Haptic Design
 Dialing Holes
 A.Constant*
 AC Depth*




NPC 502	
Optic Design	Equiconvex
Optic Size	5.25 mm
Over all Length	12.00 mm
Haptic Design	Mod. C step vault
Dialing Holes	-
A.Constant*	118.4
AC Depth*	5.0 mm




NPC 550	
Optic Design	Equiconvex
Optic Size	5.50 mm
Over all Length	12.50 mm
Haptic Design	Mod. C step vault
Dialing Holes	-
A.Constant*	118.4
AC Depth*	5.0 mm



NPC 552	
Optic Design	Equiconvex
Optic Size	5.50 mm
Over all Length	12.50 mm
Haptic Design	Cap. C step vault
Dialing Holes	-
A.Constant*	118.4
AC Depth*	5.0 mm



NPC 600	
Optic Design	Equiconvex
Optic Size	6.00 mm
Over all Length	12.50 mm
Haptic Design	Cap. C step vault
Dialing Holes	2
A.Constant*	118.4
AC Depth*	5.0 mm



Model

Optic Design
 Optic Size
 Over all Length
 Haptic Design
 Dialing Holes
 A.Constant*
 AC Depth*



NPC 602H	
Optic Design	Equiconvex
Optic Size	6.00 mm
Over all Length	13.00 mm
Haptic Design	Mod. C step vault
Dialing Holes	2
A.Constant*	118.2
AC Depth*	4.8 mm



NPC 652	
Optic Design	Equiconvex
Optic Size	6.50 mm
Over all Length	13.00 mm
Haptic Design	Mod. C step vault
Dialing Holes	2
A.Constant*	118.2
AC Depth*	4.8 mm



NSF 651	
Optic Design	Equiconvex
Optic Size	6.50 mm
Over all Length	13.50 mm
Haptic Design	Modified C
Dialing Holes	2 Eyelets
A.Constant*	118.2
AC Depth*	4.8 mm

AC LENS




NPA 603	
Optic Design	Equiconvex
Optic Size	6.00 mm
Over all Length	12.50mm / 13.00mm
Haptic Design	Modified S
Dialing Holes	-
A.Constant*	115.3
AC Depth*	2.95 mm

- ◆ Complete range of well accepted designs with proven materials.
- ◆ Biocompatible, YAG LASER compatible, UV Absorbing, Excellent Quality, Safe & Effective.
- ◆ 100% Inspected for Diopter, Resolution, Surface Quality & Dimensions

NANO PLUS

360° Square Edge Aspheric PMMA Single Piece Posterior Chamber Intraocular Lens
 Implant Pour Chambre Postérieure En PMMA Aspherique A Bord Carre A 360°
 Lente Intraoculaire PMMA, Asferico, De Una Pieza, Amarillo, Borde Cuadrado,
 360° Para Cámara Posterior



Model

Optic Design
 Optic Size
 Over all Length
 Haptic Design
 Dialing Holes
 A.Constant*
 AC Depth*



NPC 525 AS	
Optic Design	Equiconvex
Optic Size	5.25 mm
Over all Length	12.50 mm
Haptic Design	Mod. C step vault
Dialing Holes	-
A.Constant*	118.4
AC Depth*	5.0 mm




NPC 550 AS	
Optic Design	Equiconvex
Optic Size	5.50 mm
Over all Length	12.50 mm
Haptic Design	Mod. C step vault
Dialing Holes	-
A.Constant*	118.4
AC Depth*	5.0 mm



NPC 600 AS	
Optic Design	Equiconvex
Optic Size	6.00 mm
Over all Length	12.50 mm
Haptic Design	Mod. C step vault
Dialing Holes	2
A.Constant*	118.4
AC Depth*	5.0 mm

- ◆ Intraocular lens manufacturer in India
- ◆ A.Constant and AC Depth are estimated values.
- ◆ Diopter Range : -10.0 D to +35.0 D. +06.0 D to +30.0 D in steps of 0.50 D.



Model

Optic Design
 Optic Size
 Over all Length
 Haptic Design
 Dialing Holes
 A.Constant*
 AC Depth*



NPC 525 ASY	
Optic Design	Equiconvex
Optic Size	5.25 mm
Over all Length	12.50 mm
Haptic Design	Mod. C step vault
Dialing Holes	-
A.Constant*	118.4
AC Depth*	5.0 mm



NPC 550 ASY	
Optic Design	Equiconvex
Optic Size	5.50 mm
Over all Length	12.50 mm
Haptic Design	Mod. C step vault
Dialing Holes	-
A.Constant*	118.4
AC Depth*	5.0 mm



NPC 600 ASY	
Optic Design	Equiconvex
Optic Size	6.00 mm
Over all Length	12.50 mm
Haptic Design	Mod. C step vault
Dialing Holes	2
A.Constant*	118.4
AC Depth*	5.0 mm